

*P A L I I L L U M I N A Z I O N E E
A R R E D O U R B A N O
L A M I N A T I A C A L D O
H . S . P .*

*HOT ROLLED (HSP) STEEL URBAN LIGHTING POLES
POTEAUX POUR ÉCLAIRAGE URBAIN LAMINÉS à CHAUD—HSP*

*C
A
T
A
L
O
G
O


2
0
1
8*


SEI ESSE srl
Lighting

VARI TIPI DI RASTREMATURA OTTENIBILI SU SPECIFICA

DIFFERENT KINDS OF TAPERING ON DEMAND

TYPES DIFFÉRENTS DE TRONÇONS SUR DEMANDE



LEONARDO



PARMIGIANINO




BRUNELLESCHI



CORREGGIO



BEATO ANGELICO

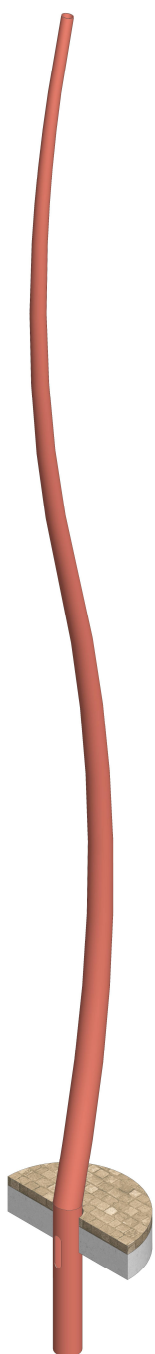


CARAVAGGIO




MICHELANGELO




RAFFAELLO

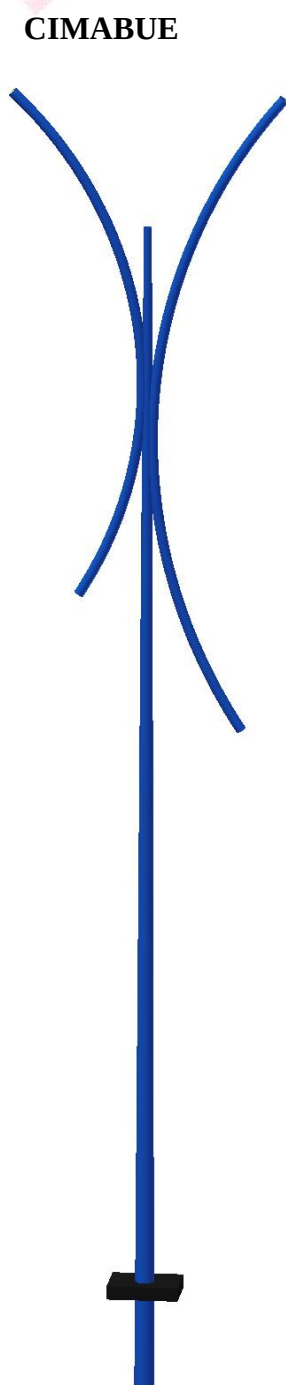


CIMABUE




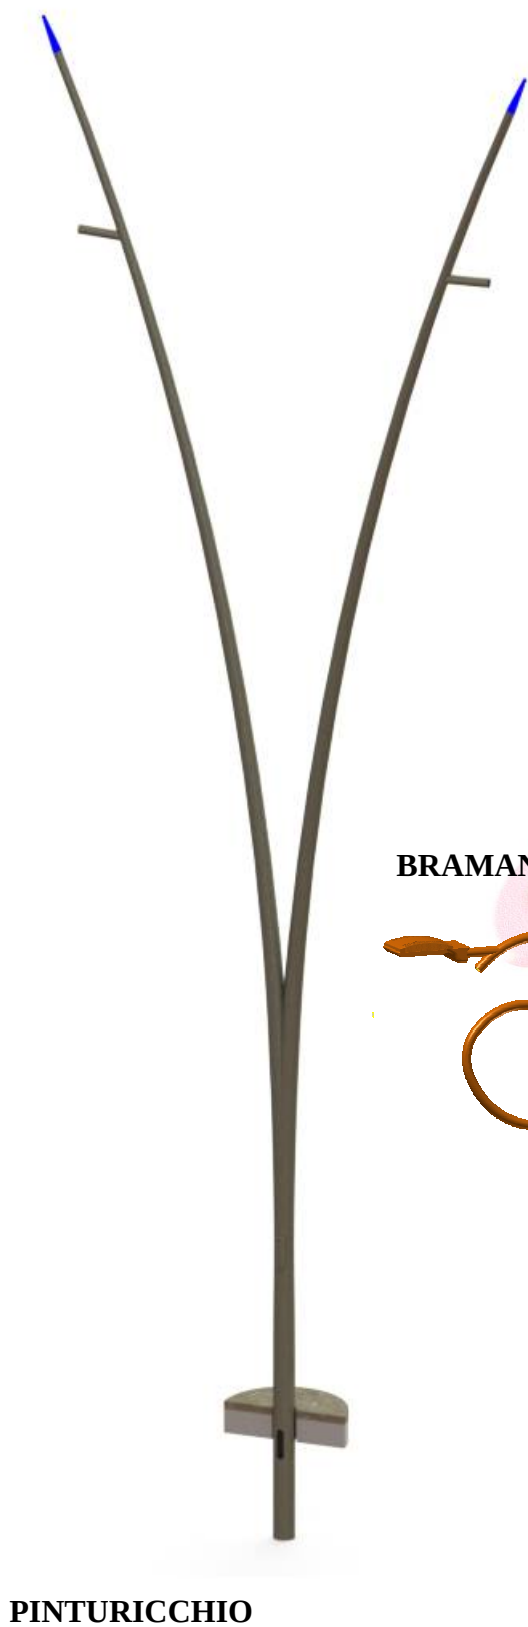

PINTURICCHIO

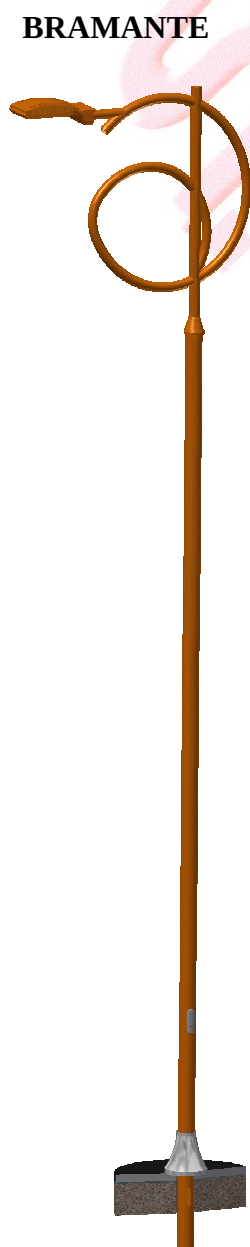

BRAMANTE

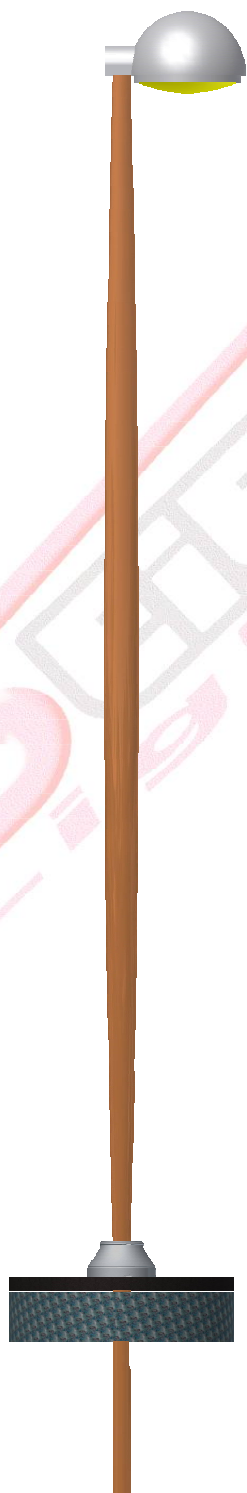

MODIGLIANI

MANTEGNA





CANOVA



DONATELLO



BOCCIONI

PALI RASTREMATI LAMINATI A CALDO— HSP


HOT ROLLED (HSP) TAPERED POLES

POTEAUX À TRONÇONS LAMINÉS À CHAUD

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

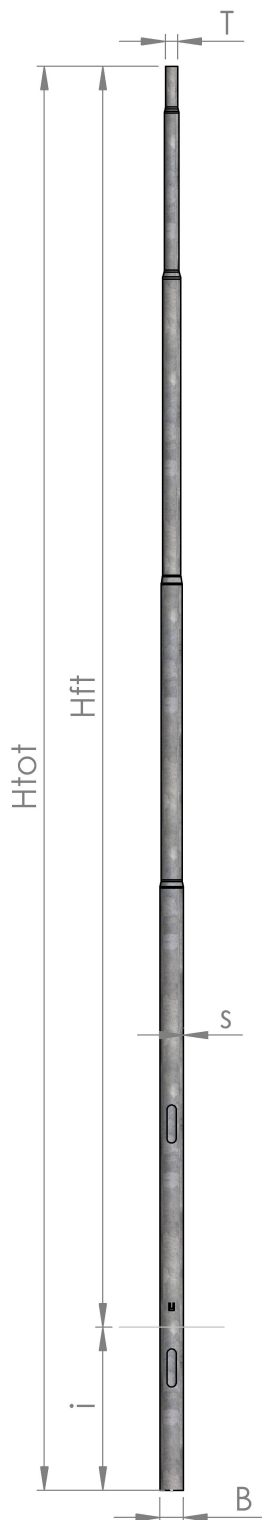

CODICE	B/T (mm)	H TOT (mm)	H F.T. (mm)	I (mm)	S (mm)	VERN (mq)	PESO (kg)
SRL4000/89	89/60	4000	3500	500	3,2	1,01	30
SRL4500/89	89/60	4500	4000	500	3,2	1,10	33
SRL5000/89	89/60	5000	4500	500	3,2	1,27	35
SRL6000/89	89/60	6000	5500	500	3,2	1,52	43
SRL6000/102	102/60	6000	5500	500	3,2	1,67	50
SRL6000/114	114/60	6000	5500	500	3,4	1,83	55
SRL7000/114	114/60	7000	6200	800	3,4	2,13	64
SRL7000/127	127/60	7000	6200	800	3,6	2,34	76
SRL7000/139	139,7/60	7000	6200	800	3,8	2,61	88
SRL8000/114	114/60	8000	7200	800	3,4	2,44	72
SRL8000/127	127/60	8000	7200	800	3,6	2,68	85
SRL8000/139	139,7/60	8000	7200	800	3,8	3,00	98
SRL8000/152	152/60	8000	7200	800	4	3,16	113
SRL8000/168	168/60	8000	7200	800	4	3,51	124
SRL9000/114	114/60	9000	8200	800	3,4	2,74	82
SRL9000/127	127/60	9000	8200	800	3,6	3,01	97
SRL9000/139	139,7/60	9000	8200	800	3,8	3,36	112
SRL9000/152	152/60	9000	8200	800	4	3,56	129
SRL9000/168	168/60	9000	8200	800	4	3,95	139
SRL9000/193	193/60	9000	8200	800	4	4,30	161
SRL10000/127	127/60	10000	9200	800	3,6	3,35	107
SRL10000/139	139,7/60	10000	9200	800	3,8	3,73	124
SRL10000/152	152/60	10000	9200	800	4	4,06	142
SRL10000/168	168/60	10000	9200	800	4	4,39	153
SRL10000/193	193/60	10000	9200	800	4	4,70	177
SRL11000/139	139/60	11000	10200	800	3,8	4,11	139
SRL11000/152	152/60	11000	10200	800	4	4,35	155
SRL11000/168	168/60	11000	10200	800	4	4,83	172
SRL11000/193	193/60	11000	10200	800	4	5,13	197
SRL11000/219	219/60	11000	10200	800	5	6,03	277
SRL12000/152	152/60	12000	11200	800	4	4,74	171
SRL12000/168	168/60	12000	11200	800	4	5,27	186
SRL12000/193	193/60	12000	11200	800	4	5,80	211
SRL12000/219	219/60	12000	11200	800	5	6,58	302

PALI CONICI LAMINATI A CALDO HSP


HOT ROLLED (HSP) CONICAL POLES

POTEAUX CONIQUES LAMINÉS À CHAUD

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

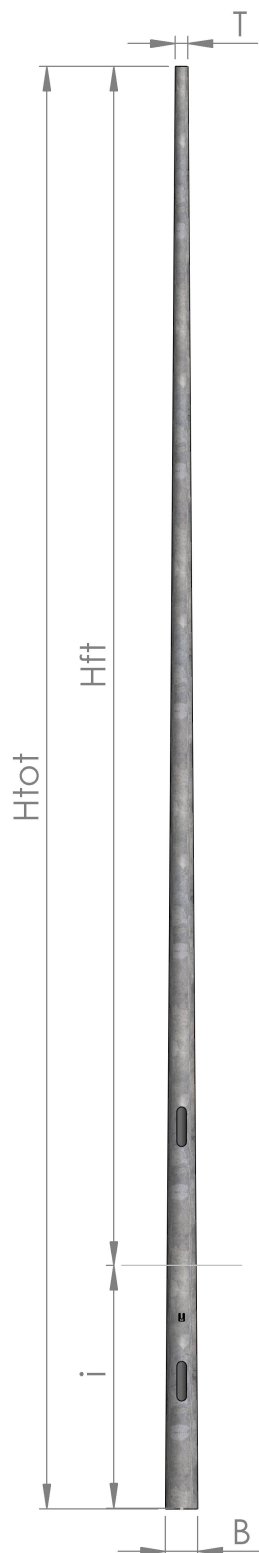

CODICE	B/T (mm)	H TOT (mm)	H F.T. (mm)	I (mm)	S (mm)	VERN (mq)	PESO (kg)
SCL4000/89	88,9/60	4000	3500	500	3,2	0,98	29
SCL4500/89	88,9/60	4500	4000	500	3,2	1,10	31,5
SCL5200/89	88,9/60	5200	4700	500	3,2	1,26	38,5
SCL6000/89	88,9/60	6000	5500	500	3,2	1,45	41
SCL6000/102	101,6/60	6000	5500	500	3,2	1,60	47
SCL6000/114	114,3/60	6000	5500	500	3,4	1,72	57
SCL6800/114	114,3/60	6800	6000	800	3,4	1,94	63
SCL6800/127	127/60	6800	6000	800	3,6	2,15	69
SCL7800/114	114,3/60	7800	7000	800	3,4	2,30	73
SCL7800/127	127/60	7800	7000	800	3,6	2,45	81
SCL8800/114	114,3/60	8800	8000	800	3,4	2,55	81
SCL8800/127	127/60	8800	8000	800	3,6	2,75	95
SCL8800/139	139,7/60	8800	8000	800	3,8	2,93	111
SCL9300/114	114,3/60	9300	8500	800	3,4	2,63	85
SCL9300/127	127/60	9300	8500	800	3,6	2,90	98
SCL9300/139	139,7/60	9300	8500	800	3,8	3,09	114
SCL9800/127	127/60	9800	9000	800	3,6	3,05	102
SCL9800/139	139,7/60	9800	9000	800	3,8	3,25	125
SCL9800/152	152,4/60	9800	9000	800	4	3,82	137
SCL9800/168	168,3/60	9800	9000	800	4	4,09	158
SCL10300/127	127/60	10300	9500	800	3,6	3,20	108
SCL10300/139	139,7/60	10300	9500	800	3,8	3,42	125
SCL10800/127	127/60	10800	10000	800	3,6	3,35	116
SCL10800/139	139,7/60	10800	10000	800	3,8	3,58	133
SCL10800/152	152,4/60	10800	10000	800	4	4,20	159
SCL10800/168	168,3/60	10800	10000	800	4	4,50	170
SCL11300/127	127/60	11300	10500	800	3,6	3,50	120
SCL11300/139	139,7/60	11300	10500	800	3,8	3,74	134
SCL12300/139	139,7/60	12300	11500	800	3,8	4,06	147
SCL12300/168	168,3/60	12300	11500	800	4	5,10	188
SCL12800/139	139,7/60	12800	12000	800	3,8	4,22	144
SCL12800/152	152,4/60	12800	12000	800	4	4,96	172
SCL12800/168	168,3/60	12800	12000	800	4	5,31	190
SCL12800/193	193/60	12800	12000	800	4	5,60	229
SCL12800/219	219/60	12800	12000	800	5	6,21	322

PALI CONICI CURVATI LAMINATI A CALDO —HSP


HOT ROLLED (HSP) CURVED CONICAL POLES (SINGLE ARM)

POTEAUX CONIQUES COURBÈS (UN SEUL BRAS) LAMINÈS À CHAUD

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

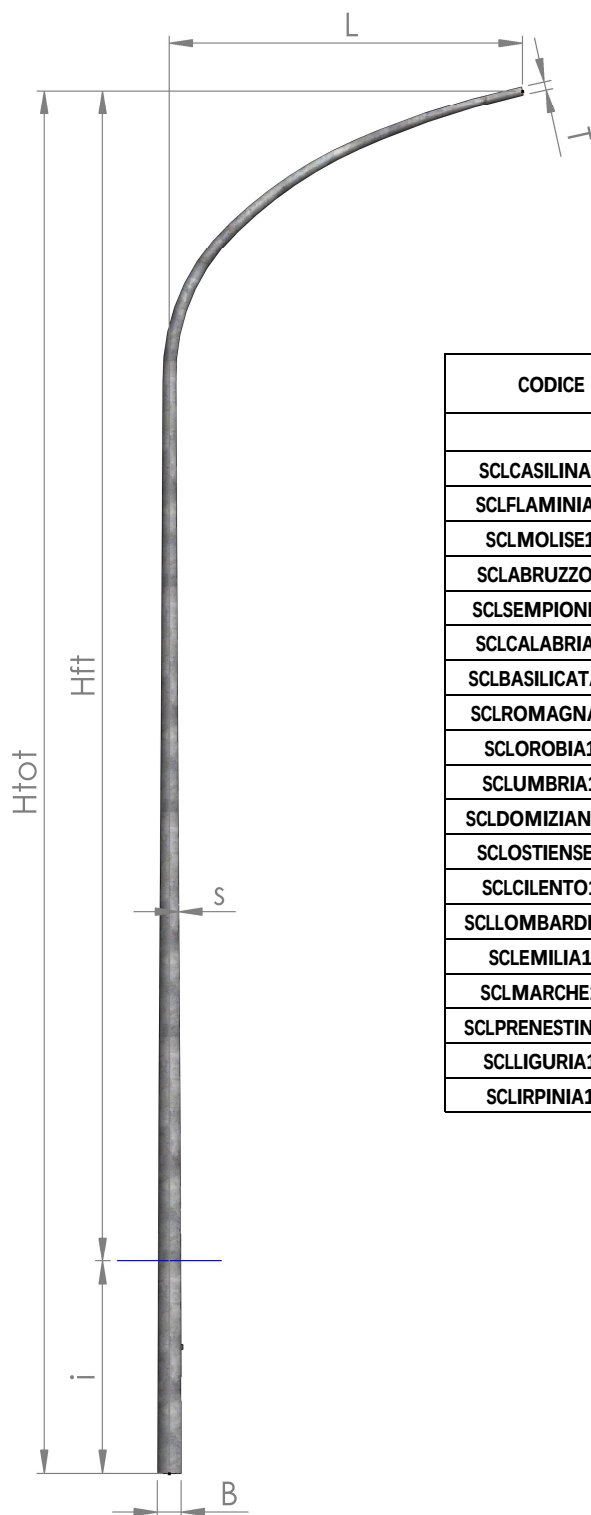

CODICE	B/T (mm)	H TOT (mm)	H F.T. (mm)	L (mm)	I (mm)	S (mm)	SV. TOTALE	VERN (mq)	PESO (kg)
SCLCASILINA127	127/60	7800	7000	1750	800	3,6	8800	2,60	88
SCLFLAMINIA127	127/60	8000	7200	2250	800	3,6	9300	2,80	90
SCLMOLISE114	114/60	8600	7800	1200	800	3,4	9300	2,60	85
SCLABRUZZO127	127/60	8600	7800	1200	800	3,6	9300	2,80	90
SCLSEMPIONE127	127/60	8600	7800	2700	800	3,6	10300	3,20	106
SCLCALABRIA127	127/60	8800	8000	2500	800	3,6	10300	3,10	106
SCLBASILICATA139	139/60	8800	8000	2500	800	3,8	10300	3,31	113
SCLROMAGNA139	139/60	9100	8300	2500	800	3,8	10300	3,42	120
SCLROBIA152	152/60	9300	8500	4200	800	4	10800	4,23	158
SCLUMBRIA127	127/60	9600	8800	1200	800	3,6	10300	3,20	106
SCLDOMIZIANA127	127/60	9800	9000	2500	800	3,6	11300	2,80	120
SCLOSTIENSE139	139/60	9800	9000	2500	800	3,8	11300	3,70	140
SCLCILENTO139	139/60	9800	9000	2900	800	3,8	10800	3,47	122
SCLLOMBARDIA139	139/60	10000	9200	2700	800	3,6	11300	3,74	134
SCLEMILIA127	127/60	10100	9300	2700	800	3,6	11300	3,4	120
SCLMARCHE127	127/60	10400	9600	1500	800	3,6	11300	3,40	120
SCLPRENESTINA139	139/60	10800	10800	2500	800	3,8	12300	4,00	152
SCLLIGURIA139	139/60	10900	10100	2700	800	3,8	12300	4	141
SCLIRPINIA139	139/60	11300	10500	2900	800	3,8	12300	3,95	144

PALI CONICI LAMINATI A CALDO CON BRACCIO DOPPIO HSP


HOT ROLLED (HSP) CONICAL POLES WITH DOUBLE ARM

POTEAUX CONIQUES LAMINÉS À CHAUD (HSP) AVEC DEUX BRAS

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

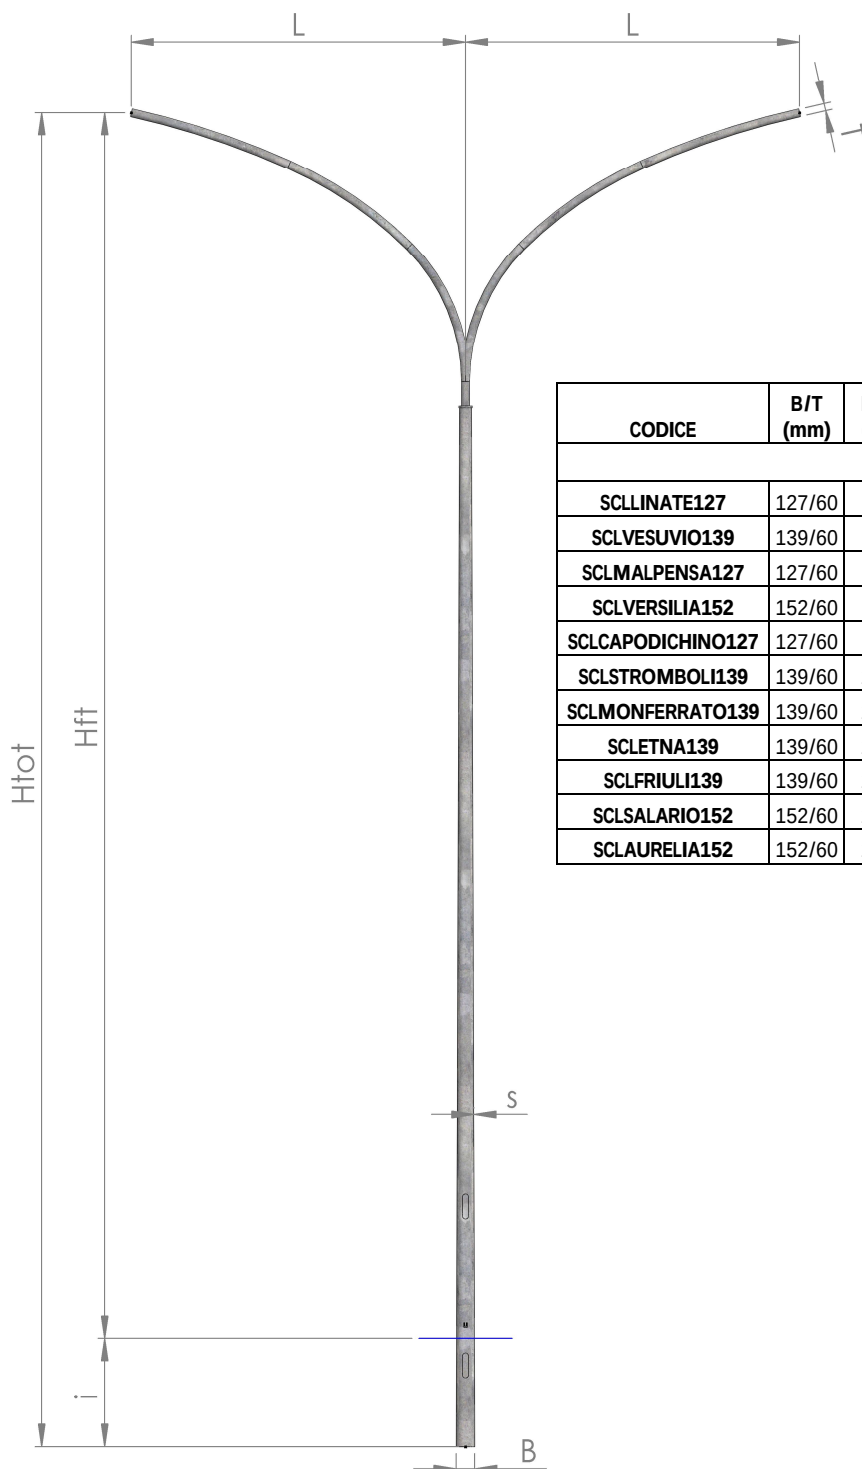

CODICE	B/T (mm)	H TOT (mm)	H.F.T. (mm)	L (mm)	I (mm)	S (mm)	VERN (mq)	PESO (kg)
SCLINATE127	127/60	9000	8200	2500	800	3,6	4,19	125
SCLVESUVIO139	139/60	9000	8200	2500	800	3,8	4,32	140
SCLMALPENSA127	127/60	9100	8300	2700	800	3,6	4,20	125
SCLVERSILIA152	152/60	9100	8300	2700	800	4	4,50	140
SCLCAPODICHINO127	127/60	9800	9000	2500	800	3,6	4,19	135
SCLSTROMBOLI139	139/60	10000	9200	2500	800	3,6	4,32	150
SCLMONFERRATO139	139/60	10100	9300	2700	800	3,8	4,8	150
SCLTNA139	139/60	10800	10000	2500	800	3,8	4,32	160
SCLFRIULI139	139/60	10900	10100	2700	800	3,8	5,10	160
SCLSALARIO152	152/60	11900	11100	2500	800	4	4,46	185
SCLAURELIA152	152/60	11900	11100	2700	800	4	5,50	185

PALO “BOTTICELLI” A BOTTE LAMINATO—HSP


HOT ROLLED (HSP) POLE “BOTTICELLI” BARREL- SHAPED

POTEAU LAMINÉ À CHAUD (HSP) “BOTTICELLI” EN FORME DE CUVE

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

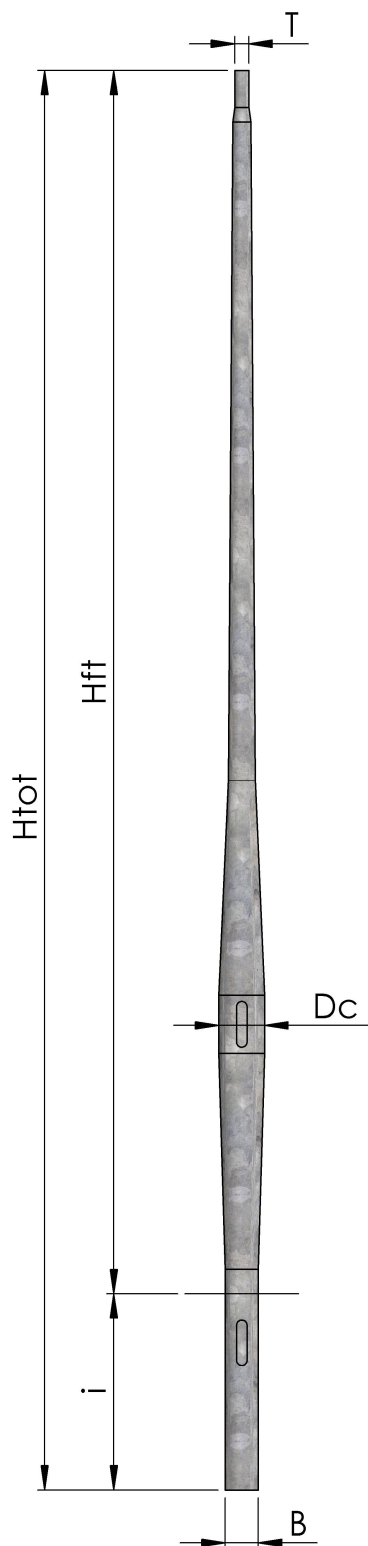

CODICE	B/T (mm)	DC (mm)	HTOT (mm)	H.F.T. (mm)	I (mm)	S (mm)	VERN (mq)	PESO (kg)
SLBOT4012760	127/60	139	4000	3500	500	4	1,17	49
SLBOT50139102	139/102	168	5000	4500	500	4	2,90	86
SLBOT68139102	139/102	168	6800	6000	800	4	3,33	94
SLBOT78139102	139/102	168	7800	7000	800	4	3,70	105
SLBOT88139102	139/102	168	8800	8000	800	4	4,38	124
SLBOT98139102	139/102	168	9800	9000	800	4	4,96	155
SLBOT08139102	139/102	168	10800	10000	800	4	5,43	173

I pali possono essere ridotti a dm 60 - 76 - 90mm.

The top of the poles can be produced to dm 60-70 and 90mm

Les pôles supérieurs peuvent être réduits à dm 60 - 76 et 90mm



PALO “GIOTTO ” CILINDRICO-CONICO LAMINATO—HSP


HOT ROLLED (HSP) CYLINDRICAL- CONICAL POLE “GIOTTO”

POTEAU LAMINÉ À CHAUD “GIOTTO” EN FORME CYLINDRIQUE-CONIQUE

Realizzati in acciaio S275JR zincato a caldo. Lavorazioni standard alla base.

Made of hot-dip galvanized S275JR steel. Standard processing at the base.

Fabriqués en acier S275JR galvanisé à chaud. Traitements standard à la base.

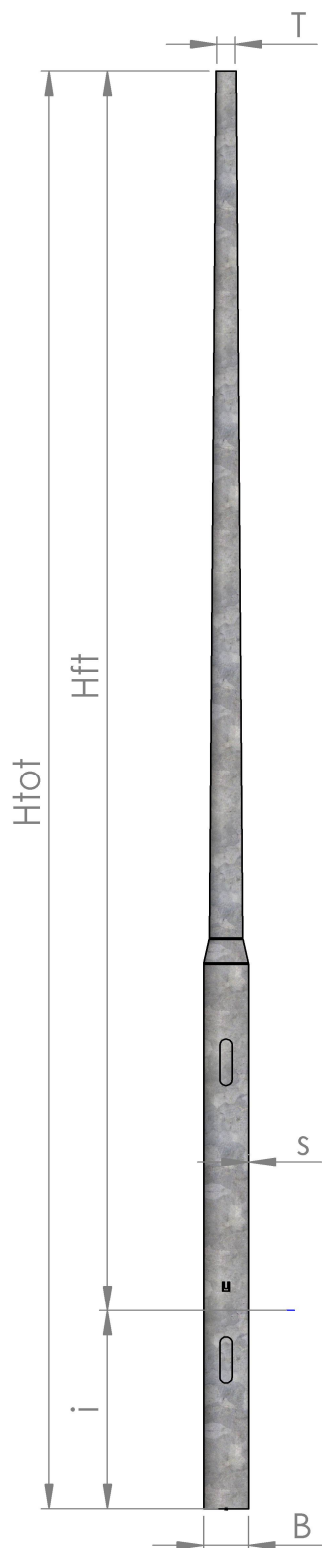

CODICE	B/T (mm)	H TOT (mm)	H F.T. (mm)	I (mm)	S (mm)	VERN (mq)	PESO (kg)
SLGIO4816860	168/60	4800	4000	800	4	2,23	76,3
SLGIO5816875	168/75	5800	5000	800	4	2,70	87,5
SLGIO6816875	168/75	6800	6000	800	4	2,82	100
SLGIO7816875	168/75	7800	7000	800	4	3,18	115
SLGIO8816875	168/75	8800	8000	800	4	3,54	130
SLGIO9816875	168/75	9800	9000	800	4	3,90	143
SLGIO10816875	168/75	10800	10000	800	4	4,22	153



BRACCI ARREDO— URBAN




PRAGA




DHAKA



SINGAPORE

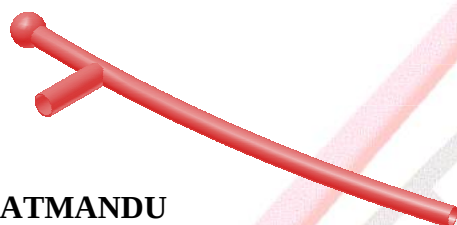


KATMANDU

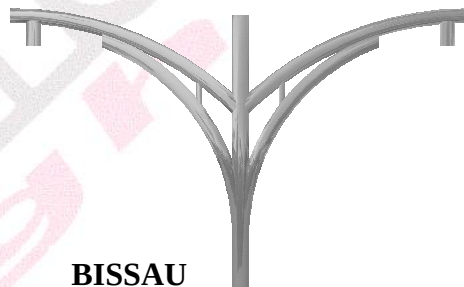


BISSAU



MINSK




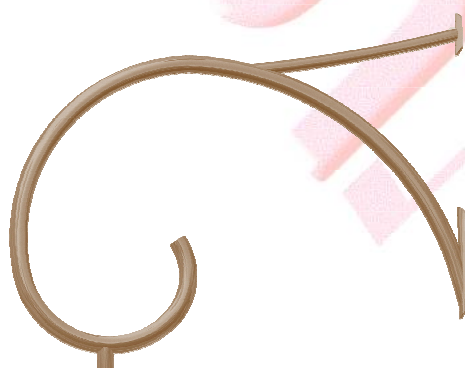


NASSAU

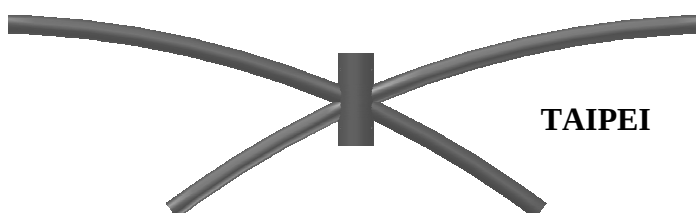


TAIPEI

LIGHTING— ÉCLAIRAGE URBAIN

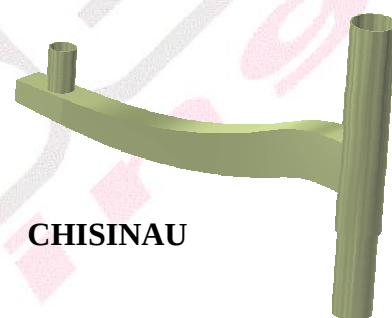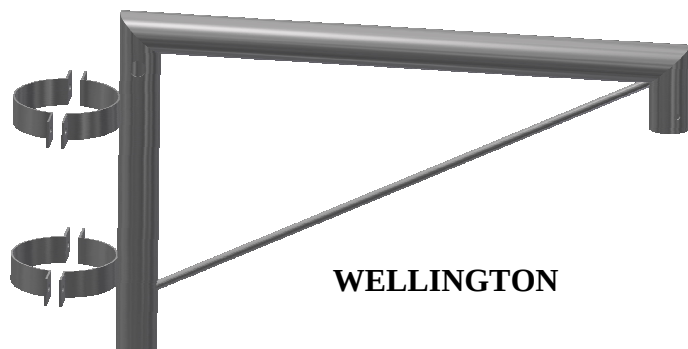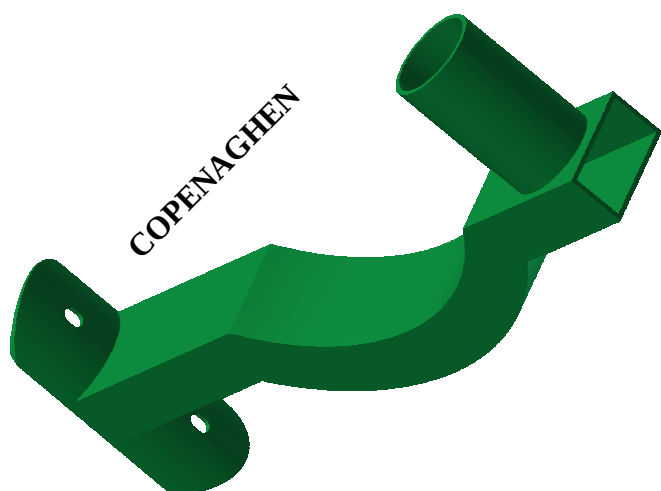

CHISINAU

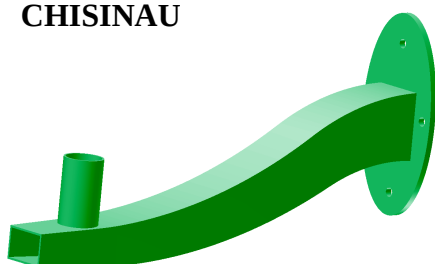


HONIARA



PALI PER ROTONDE LAMINATI A CALDO - HSP

HOT ROLLED (HSP) POLES FOR ROUNDABOUTS

POTEAUX LAMINÉS À CHAUD (HSP) POUR ROND POINTS

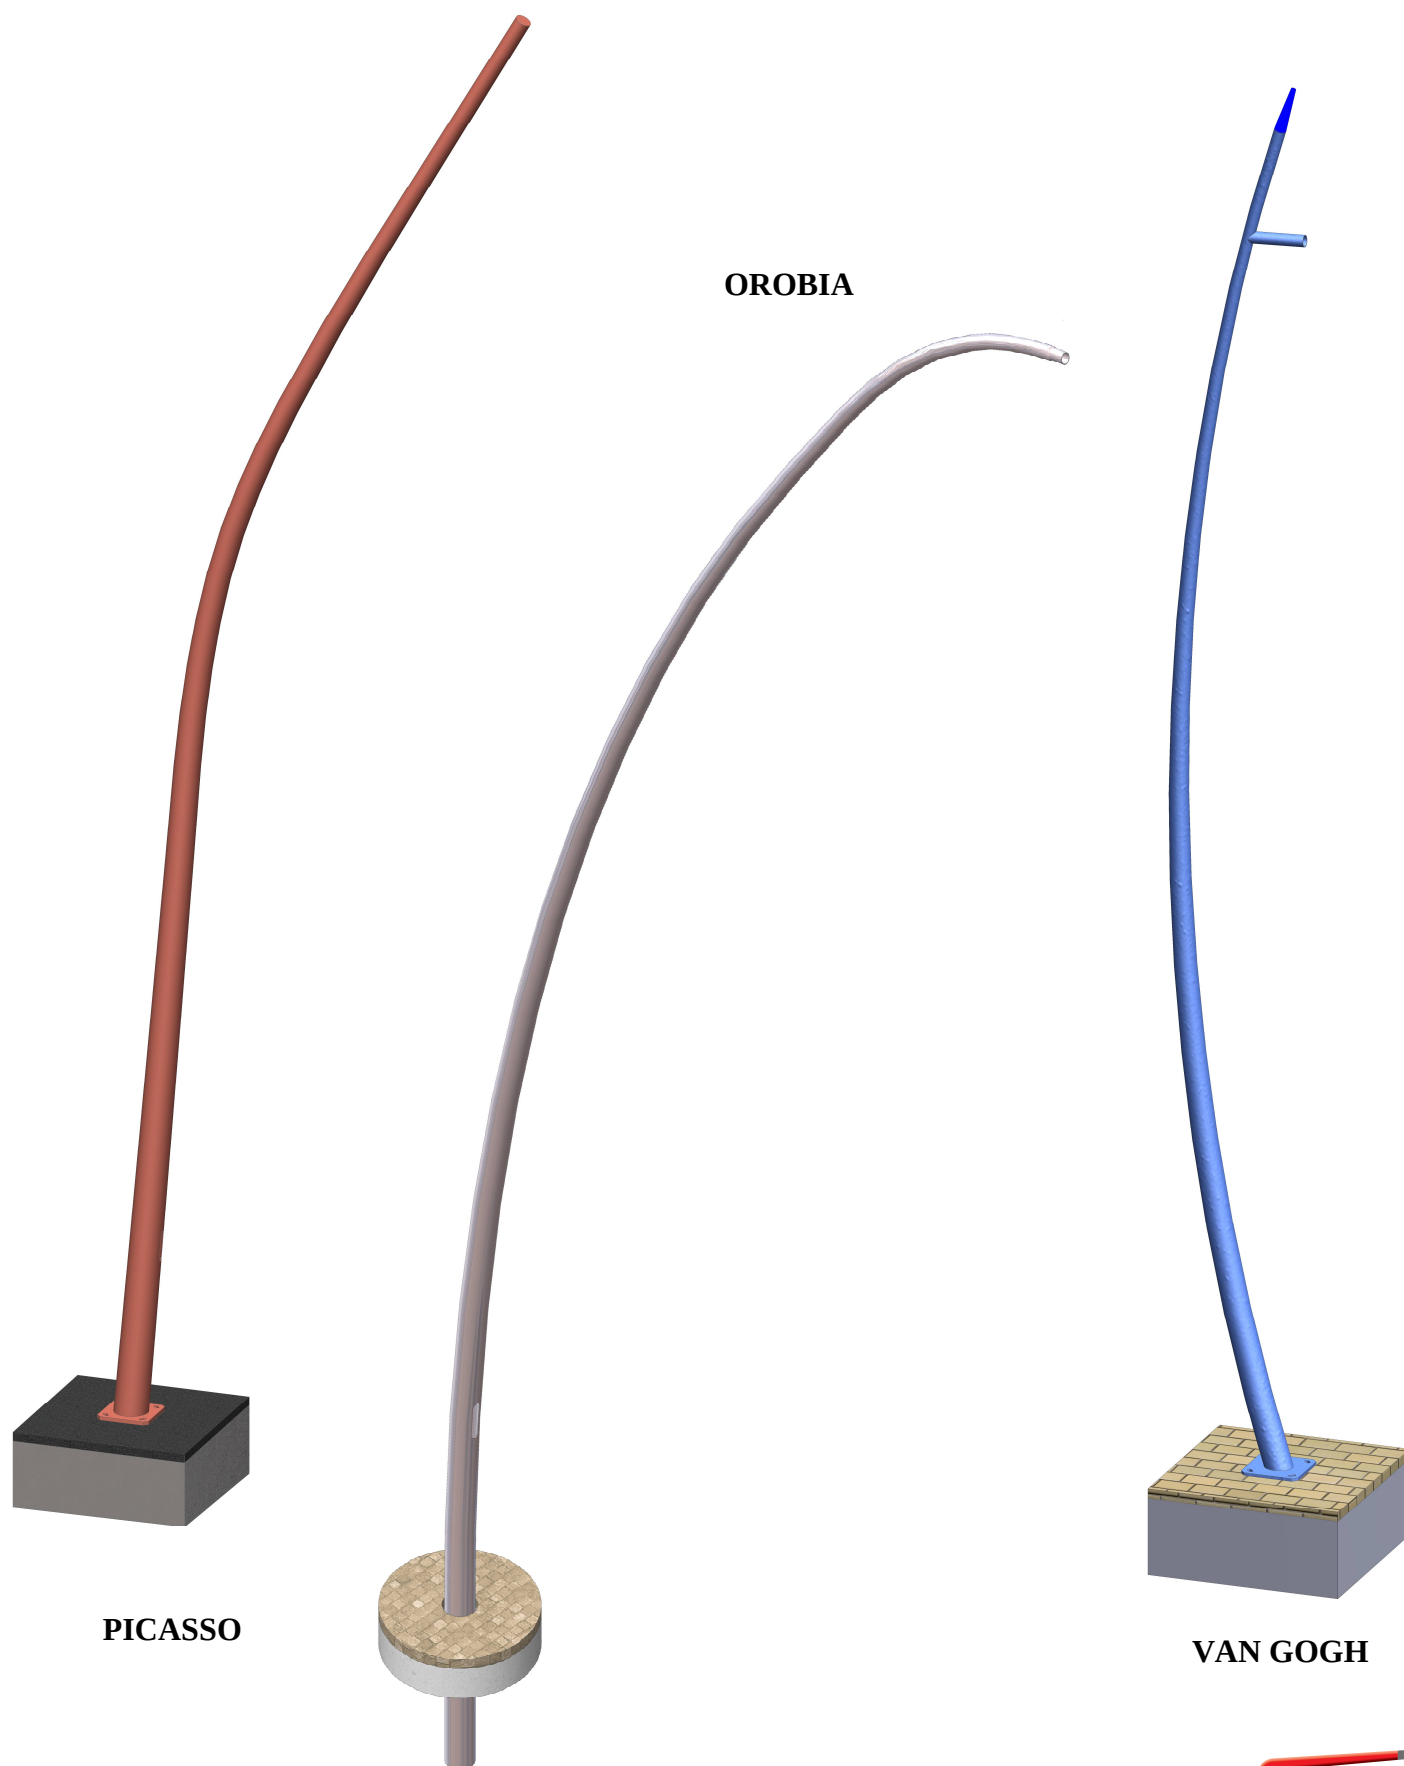

ACCESSORI PER DECORO PALI ILLUMINAZIONE

DECORATIVE ACCESSORIES FOR LIGHTING POLES

ACCESSOIRES DE DÉCOR POUR POTEAUX

PUNTALI — DECORATIVE TERMINALS—POINTE DE DÉCORE



P 55 IN ALLUMINIO
P 55 ALUMINUM
P 55 EN ALUMINIUM

P-LED
Realizzabile in varie altezze:
Available in various heights
Disponible en différentes hauteurs

BERNINI

PA 680 IN ACCIAIO
PA 680 STEEL
PA 680 EN ACIèR

CANALETTO

SEIESTE
Lighting

ANELLI DI DECORO COPRIRASTREMATURE


DECORATIVE RINGS AS TAPERING COVER


BAGUES DÉCORATIVES COMME COUVERCLE

in acciaio zincato e verniciato o in alluminio verniciato—Hot galvanized steel and painted or aluminium painted—Acier galvanisé à chaud et peint ou aluminium peint

Per tipologie di diametro: For type of diameter - Selon le Type de diamètre.

D.76 - d.60 mm D.89 - d.76 mm D.102 - d.89 mm D.114- d.102 mm D.127- d.114 mm
mm.139 - d.127 mm D.152 - d.127 mm D.168 - d.159 mm

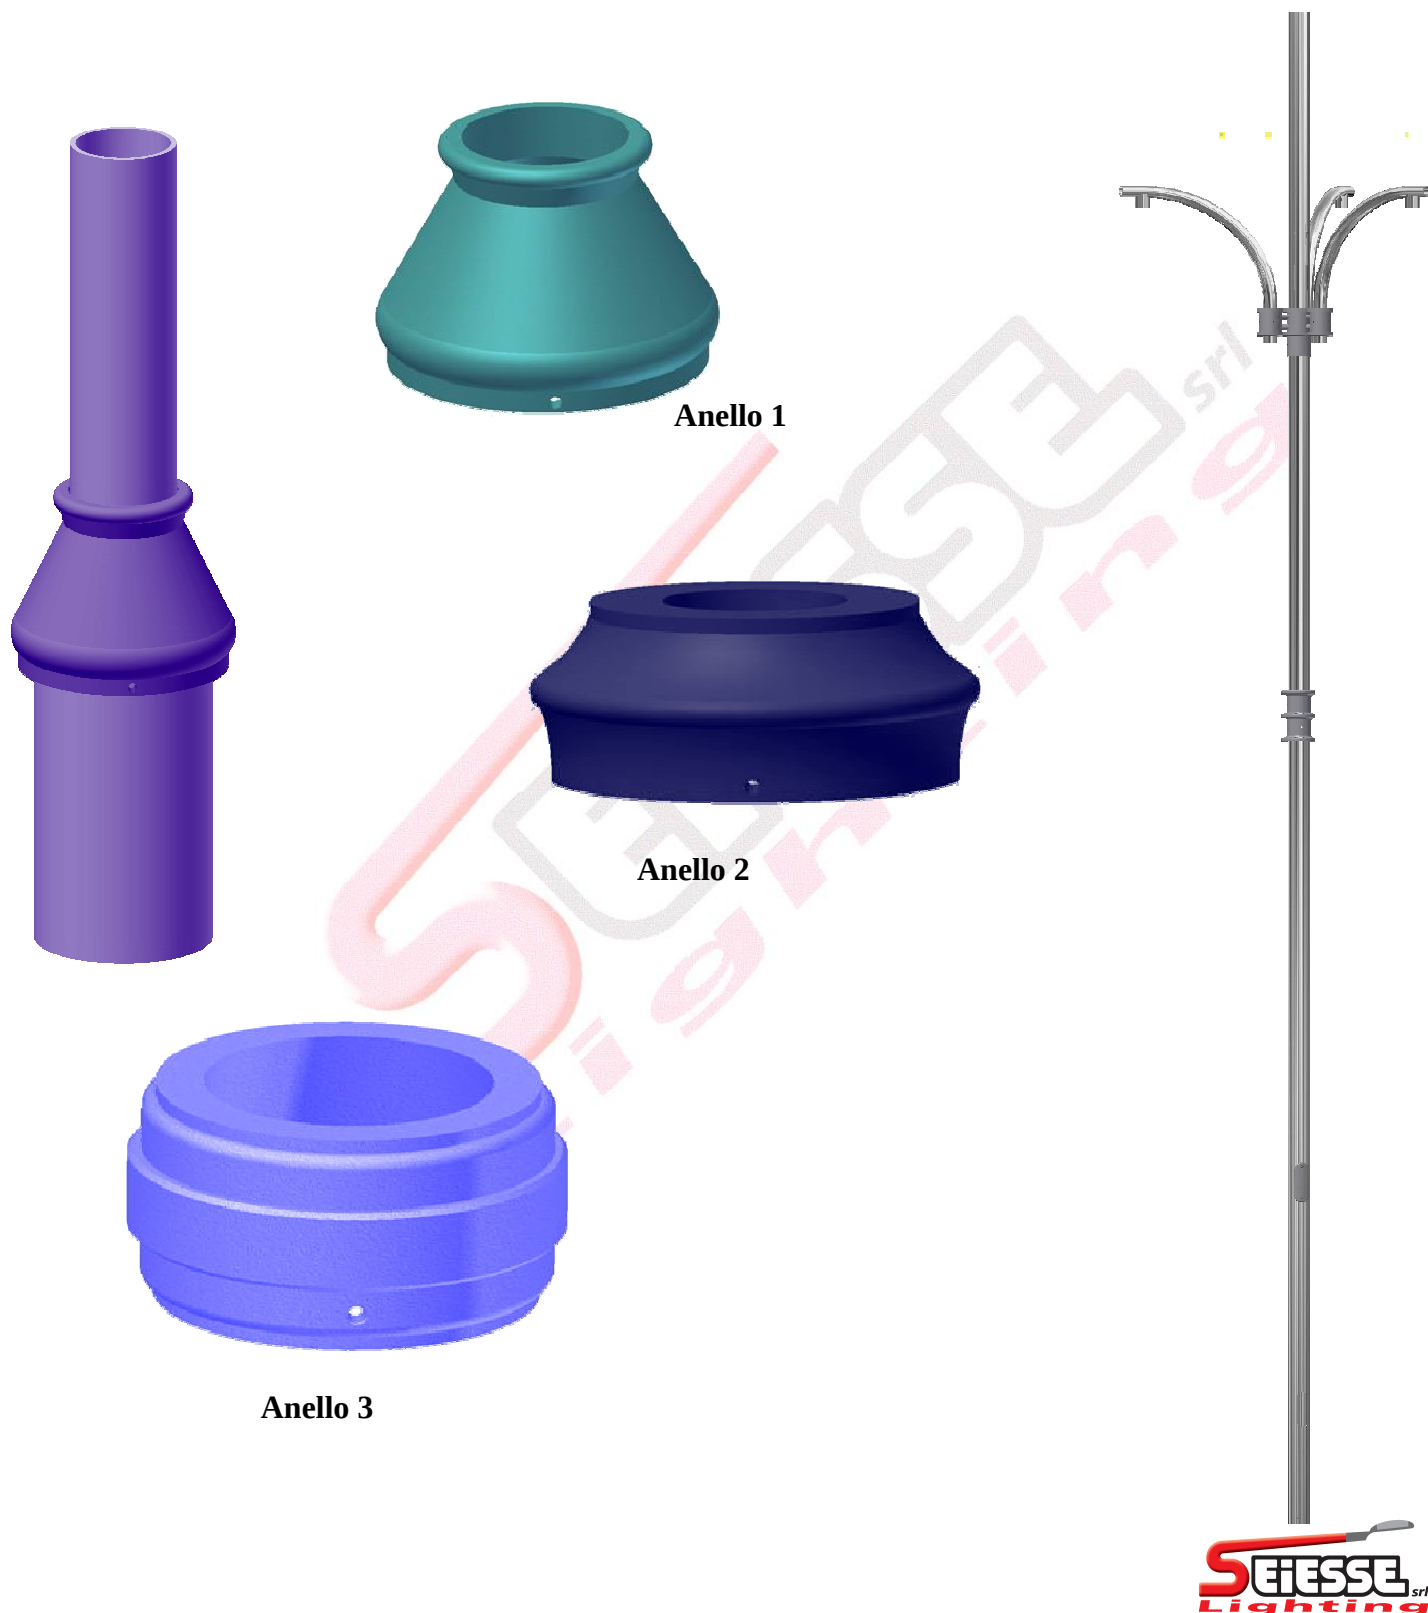


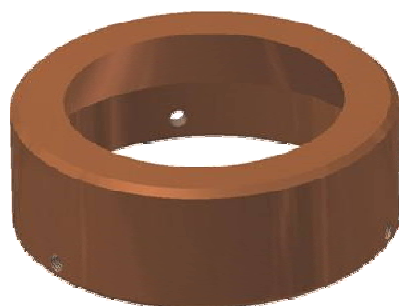


ANELLO 4



ANELLO 5

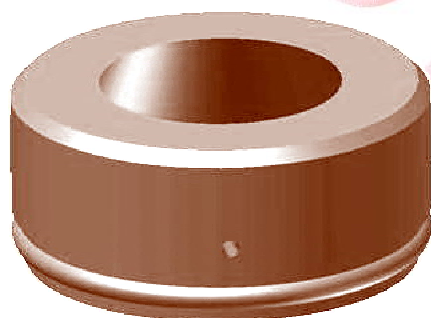

ANELLO 6

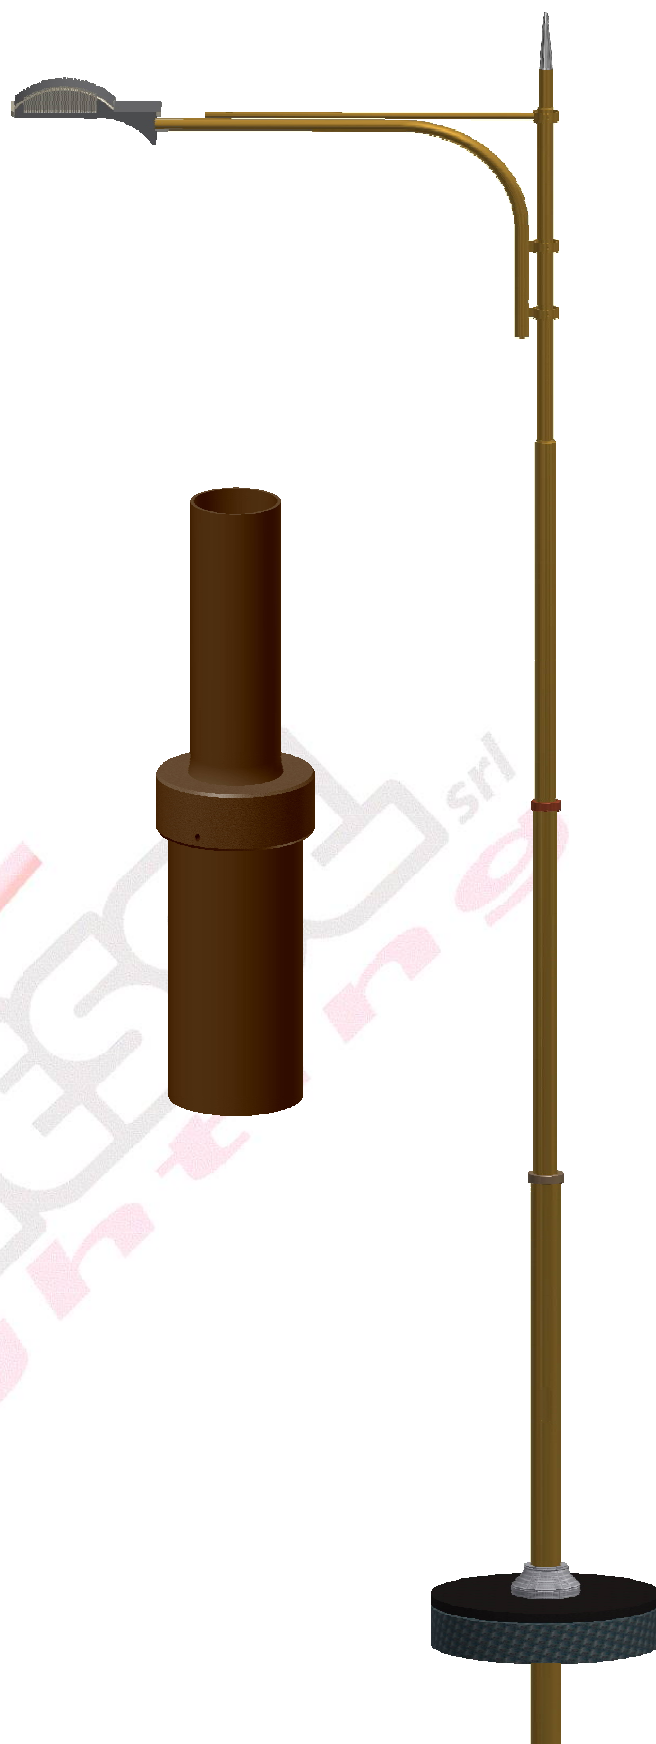

BASI DI DECORO— DECORATIVE

IN ALLUMINIO - ALUMINIUM CASTING—
COULÉE D'ALUMINIUM

(Fusioni in Terra)

Per tipologie di diametro:

For type of diameter

Selon le Type de diamètre

D.121mm D.127mm D.139mm

D.152/159mm



BASE ALL 2

BASES - BASES DE DÉCORATION

IN ACCIAIO - STEEL— EN ACIER

(lamiera 12/10-15/10-20/10)

Per tipologie di diametro:



For type of diameter

Selon le Type de diamètre

D.102mm D.114mm D.121mm

D.127mm D.139mm D.152mm

D.159 mm D.168 mm D.193 mm

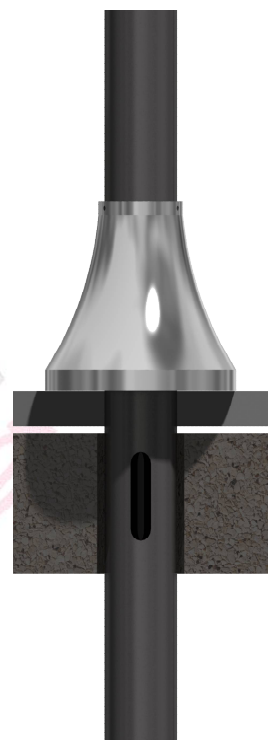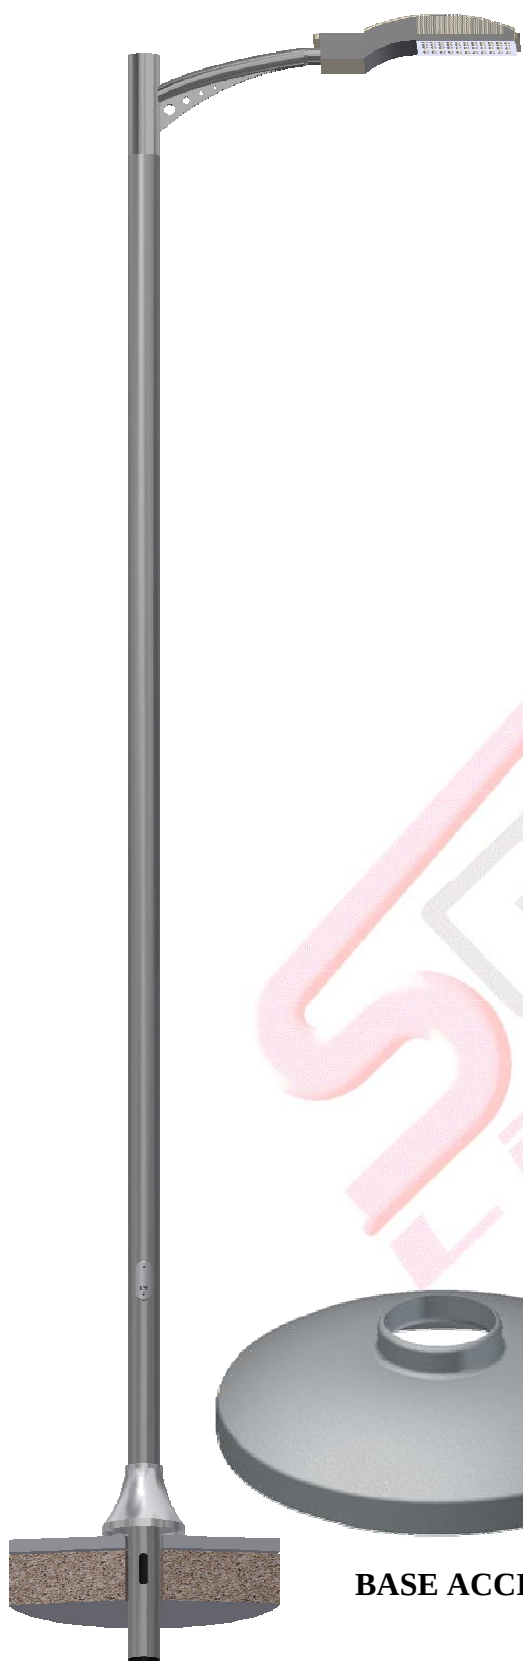


BASE ACCIAIO 5



BASE ACCIAIO 3



BASE ACCIAIO 1

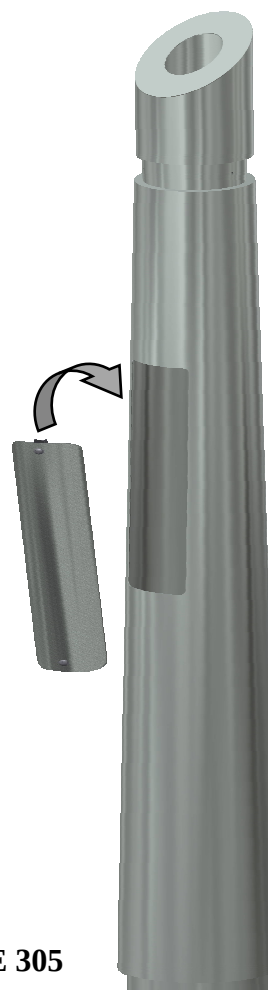

BASE 305



VASARI



DE CHIRICO



PIERO DELLA
FRANCESCA



TINTORETTO



MASACCIO

SEIESSE LIGHTING SRL

VIA DEI CARRETTIERI 2

06081 ASSISI - PG

TEL 075/805991—FAX 075/8042958

EMAIL: commerciale@seiesselighting.com

